

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


ON



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B22D 17/00, B21C 23/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/33610</b>
			(43) International Publication Date: 6 August 1998 (06.08.98)
(21) International Application Number: PCT/CA98/00062		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 2 February 1998 (02.02.98)			
(30) Priority Data: 2,196,479 31 January 1997 (31.01.97) CA 2,227,828 23 January 1998 (23.01.98) CA			
(71) Applicant: AMCAN CASTINGS LIMITED [CA/CA]; 10 Hillyard Street, P.O. Box 446, Hamilton, Ontario L8L 7X3 (CA).			
(72) Inventor: WOODHOUSE, Gordon; 14 Leawood Court, St. Catharines, Ontario L2T 3R6 (CA).			
(74) Agents: MILNE, Peter et al.; Rogers & Milne, Suite 1004, 357 Bay Street, Toronto, Ontario M5H 2T7 (CA).			
		<p><b>Published</b></p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: SEMI-SOLID METAL FORMING PROCESS

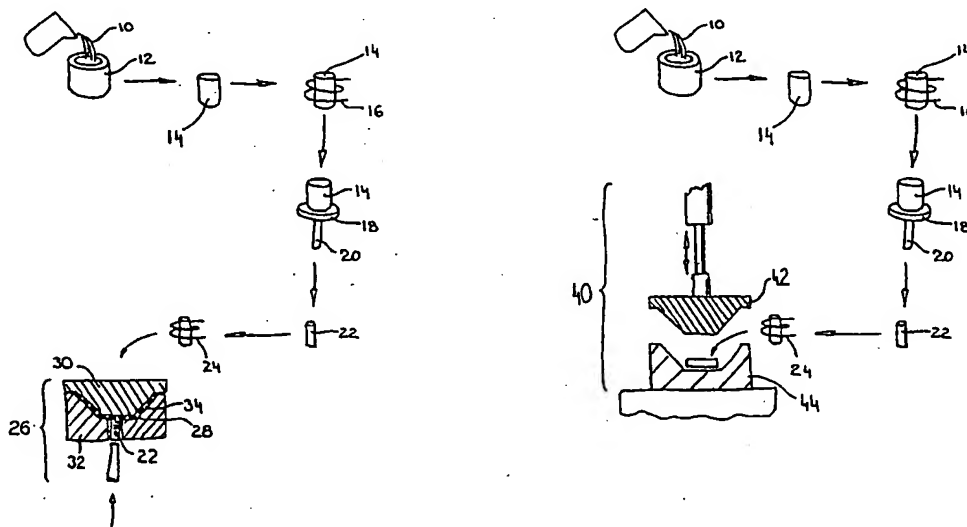

(57) Abstract

A semi-solid metal forming process using a cast billet and having the following steps: 1) heating the cast billet to a temperature above its recrystallization temperature and below its solidus temperature; 2) extruding the cast billet into an extruded column; 3) cutting the extruded column into at least one billet; 4) heating the billet from step 3 to a semi-solid state; and 5) squeezing the billet from step 4 into a cavity in a metal forming die set to form a part.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## Semi-Solid Metal Forming Process

5

### FIELD OF THE INVENTION

This invention relates generally to semi-solid metal forming and more particularly to the formation and use of magnesium billets in semi-solid metal die casting and semi-solid forging processes.

10

### BACKGROUND

Metal die casting is a process in which molten metal is caused to flow into a cavity defined by a mold. In conventional metal die casting, molten metal is injected into the cavity. In semi-solid metal die casting processes, a metal billet is pre-heated to a point of softening, to a temperature above the solidus and below the liquidus to produce a partially solid, partially liquid consistency prior to placing the billet or "slug" in a shot sleeve in the casting machine.

20

Semi-solid metal die casting enables control of the microstructure of the finished part to a degree which produces a stronger part than is possible with conventional molten metal die-casting processes. As compared with conventional metal die-casting processes, semi-solid metal casting produces parts of improved casting quality in that they exhibit lower porosity, parts shrink less upon cooling enabling closer tolerances and physical properties are better. In addition, semi-solid metal casting has a reduced cycle time and the lower temperatures utilized result in decreased

25

die wear. Because of the absence of molten metal there is less pollution and safety hazards are reduced.

5 In semi-solid metal die casting, a billet is first formed which is treated to form fine grained equiaxed crystals as opposed to a dendritic structure. Subsequent heating, forming and solidification of a formed part using a treated billet avoids the formation of a dendritic structure in the finished part.

10 To work successfully in semi-solid metal casting, the grain structure of a billet must exhibit the necessary degree of lubricity and viscosity to give good laminar flow in the die cavity. For example an untreated DC cast billet will shear along its dendritic axis rather than flow hence the need for fine grained equiaxed crystals.

15 Flowability is further affected by grain size and solid/liquid ratio. In addition forming parameters such as die temperatures and gate velocity will affect the casting process. Accordingly, all of the foregoing parameters have to be optimized in order to produce successful parts.

20 Metal forging is another process in which metal is caused to flow into a cavity defined by a mold. Unlike die casting, metal is not injected as a liquid into the cavity, but rather a solid billet or slug is placed between dies which are subsequently forced together to squeeze the billet or slug into the  
25 cavity as the die is closed. In semi-solid metal forging, the metal billet is pre-

heated to a partially solid, partially liquid consistency prior to forging. The consistency is similar to that used for semi-solid metal die casting.

As in semi-solid metal die casting, the billet should consist of fine  
5 grained equiaxed crystals rather than a dendritic structure to optimize the flow of metal between the dies and to optimize the physical characteristics of the finished parts.

An earlier process for forming a treated billet involves the use of  
10 magnetic stirring during the cooling of a cast billet to break up and avoid the formation of a dendritic structure. Magnetic stirring is however a relatively slow and expensive process.

U.S. patent no. 4,415,374 (Young et al) describes an alternate process  
15 for forming a billet of aluminum for use in a semi-solid metal die casting process. Young et al describes a process having the following steps:

1. Melting and casting an ingot;
2. Cooling the ingot to room temperature;
3. Reheating the ingot above its recrystallization  
20 temperature but below its solidus temperature;
4. Extruding the ingot;
5. Cooling the ingot to room temperature;
6. Cold working the ingot;
7. Reheating the ingot above its solidus temperature; and
- 25 8. Forming and quenching the ingot.

The ingot produced according to the process described in Young may then be subsequently heated to semi-solid casting temperature and formed into a part in a die casting process.

5

Even though Young avoids the requirement for magnetic stirring, it is nevertheless a cumbersome process including a large number of process steps.

10

More recently a process has been proposed in which a cast ingot is machined down to a billet of approximately one inch in diameter and deformed by subjection to a compressive force. The deformed billet is then heated to a temperature above its recrystallization temperature and below its solidus temperature. The billet is then cooled to room temperature for subsequent re-heating and use in a semi-solid metal casting process. This process however involves an expensive and wasteful machining operation and only appears to work with relatively small billet diameters of less than about one inch (approximately 25 mm) diameter.

15

20

It is therefore an object of the present invention to provide a process for semi-solid metal die casting which avoids not only magnetic stirring, but also eliminates many of the steps that would be required pursuant to the Young process.

25

It is a further object of the present invention to provide a semi-solid metal die casting process which avoids the machining, cold working heating, cooling and re-heating steps associated with other processes.

30

It is yet a further object of the present invention to provide a process capable of forming billets for use in semi-solid metal die casting processes that may be significantly greater than about one inch (approximately 25 mm) in diameter.

### SUMMARY OF THE INVENTION

A semi-solid metal forming process using a cast billet and having the  
5 following steps:

1. heating the cast billet to a temperature above its  
recrystallization temperature and below its solidus  
temperature;
- 10 2. extruding the cast billet in an extruded column;
3. cutting the extruded column into at least one billet;
4. heating the billet from step 3 to a forming temperature  
corresponding to a semi-solid state; and
- 15 5. squeezing the billet from step 4 into a cavity in a metal  
forming die set to form a part.

### DESCRIPTION OF DRAWINGS

20 Preferred embodiments of the present invention are described below  
with reference to the accompanying drawings in which:

Figure 1A is a schematic representation of the process of the present  
invention;

25 Figure 1B is a schematic representation of an alternate embodiment  
process according to the present invention;

Figures 2 through 30 are photomicrographs of billets cut from  
extruded cast billets and are individually described in Example 1  
below;

Figure 31 illustrates sample locations in a test plate which were tested in Example 3;

Figure 32 illustrates the locations at which photomicrographs were taken in Example 3 below; and

5        Figures 33 through 36 are photomicrographs individually described in Example 3 below.

### DESCRIPTION OF PREFERRED EMBODIMENTS

10

Referring to Figure 1, molten metal 10 is poured from a ladle into a mold 12 and allowed to solidify into a cast billet 14. The cast billet 14 is heated, for example by inductive heating coil 16 to a temperature above its recrystallization temperature and below its solidus temperature.

15

The heated cast billet 14 is then extruded through an extruding die 18 to form an extruded column 20. The extruded column 20 is cut to a suitable length billet 22 for use in a semi-solid metal die casting process.

20

The billet 22 is heated to a forming temperature corresponding to a semi-solid state, for example by induction coils 24, and transferred to a die casting apparatus 26. The heated billet 22 is squeezed by the die casting apparatus into a cavity 28 between mold parts 30 and 32 to form a part 34 conforming in shape to that of the cavity 28.

25

Alternatively, the heated billet 22 may be transferred to a forging apparatus 40 where it is squeezed into a cavity defined between a movable die 42 and a fixed die 44.

30

The present invention is further illustrated by the examples set out below.



EXAMPLE 1

The microstructure of two AZ61 alloy, 3 in. diameter by 7 in. length extruded billets in the as extruded and solution heat treated condition were  
5 examined.

The billets were produced initially as an 8 1/2 in. direct chill cast billet. The billets were cooled at a high chill rate utilizing copper molds and a water spray to provide a chill rate of at least 2°C per second at the billet  
10 centre. The billets were cut into 2 ft. long sections and the diameter machined down to 8 in. to remove imperfections to the outside edge.

Grain sizing of the 8 inch billet perpendicular to the extrusion axis was 38 microns at the outside, 48 microns at the half radius and 48 microns  
15 at the center. As expected, the grain size in the longitudinal or extrusion direction was somewhat larger being approximately 51 microns at the outside, 64 microns at the half radius and 74 microns at the center.

The billets were then heated in 4-6 minute intervals in three  
20 induction furnaces. The furnaces heated the billets to 100°C, 200°C, 300°C (total heating time approximately 15 minutes.) The billet was then placed in the extrusion chamber, which was at 380°C and the billet was extruded at between 330°C and 350°C, in one stage down to a 3 in. diameter extrusion billet. The first 14 ft. of extrusion and the last few feet were discarded. The  
25 remainder of the extrusion was cut into 7 in. sections or "slugs".

PROCEDURE

Two of the sections of the extrusion billet referred to as billet 1 and  
30 billet 2, in AZ61 alloy were examined in the "as extruded" condition by sectioning a 0.5 in. section off the end of each billet, (billets were randomly selected.) A micro was taken perpendicular to the axis of the billet from the centre and from the outside edge. The micros were polished and etched

- 8 -

using 2% nitol etchant. The micros were examined at various magnifications to observe grain structure. A photomicrograph was taken at each magnification and the grain size estimated.

- 5        The two extrusion billet sections were then given the following solution heat treatment to recrystallize the grain structure;

SOLUTION HEAT TREATMENT

- 10       Ramp 150°C - 338°C                      3.0 hrs  
          Hold 338°C                                0.1 hrs  
          Ramp 338°C - 413°C                    1.5 hrs  
          Hold 413°C                                0.5 hrs  
15       Ramp 413°C - 426°C                    0.5 hrs  
          Hold 426°C                                12.0 hrs  
          Air Cool  
          (Furnace atmosphere 10% CO<sub>2</sub> to avoid ignition.;

- 20       The same procedure was followed in billet sectioning polishing and etching as previously described with the "as extruded" billet sections.

- 25       From the same samples micros were made at the centre of each billet parallel to the extrusion axis. These micros were taken from the as extruded and the solution heat treated billets. Photo micrographs were made at from 100 x to 400 x magnification of these samples.

- 30       The purpose for solution heat treating the extrusion billets and analyzing the samples was to determine the effect on grain size and shape resulting from heating and extruding the DC cast billet. The solution heat treating was not carried out under the optimum circumstances as equipment availability necessitated the use of convection heating rather than induction heating. Preferably the heating cycle should not exceed 20

minutes and accordingly multi-state induction heating would be preferable over convection heating. Nevertheless the results were quite favourable as set out below.

5

## RESULTS

The photomicrographs which are set out in Figures 2 through 30 below were taken are as follows:

10

Figure 2 is a photomicrograph of the outside edge of billet 1, as extruded, at 200 x magnification.

15

Figure 3 is a photomicrograph of the outside edge of billet 1, as extruded at 400 x magnification;

Figure 4 is a photomicrograph of the centre of billet 1, as extruded under 100 x magnification;

20

Figure 5 is a photomicrograph of the centre of billet 1, as extruded under 200 x magnification;

Figure 6 is a photomicrograph of the outside edge of billet 2, as extruded, at 200 x magnification;

25

Figure 7 is a photomicrograph of the outside edge of billet 2, as extruded, at 400 x magnification;

Figure 8 is a photomicrograph of the centre of billet 1, as extruded, at 30 400 x magnification;

Figure 9 is a photomicrograph of the centre of billet 2, as extruded, at 200 x magnification;

Figure 10 is a photomicrograph of the centre of billet 2, as extruded, at 400 x magnification;

5        Figure 11 is a photomicrograph of the outside edge of billet 1, extruded and solution heat treated, at 50 x magnification;

Figure 12 is a photomicrograph of the outside edge of billet 1, extruded and solution heat treated, at 100 x magnification;

10

Figure 13 is a photomicrograph of the outside edge of billet 1, extruded and solution heat treated, at 200 x magnification;

15        Figure 14 is a photomicrograph of the centre of billet 1, extruded and solution heat treated at 50 x magnification;

Figure 15 is a photomicrograph of the centre of billet 1, extruded and solution heat treated at 100 x magnification;

20        Figure 16 is a photomicrograph of the centre of billet 1, extruded and solution heat treated, at 200 x magnification;

Figure 17 is a photomicrograph of the outside edge of billet 2, extruded and solution heat treated, at 50 x magnification;

25

Figure 18 is a photomicrograph of the outside edge of billet 2, extruded and solution heat treated, at 100 x magnification;

30        Figure 19 is a photomicrograph of the outside edge of billet 2, extruded and solution heat treated, at 200 x magnification;

Figure 20 is a photomicrograph of the centre of billet 2, extruded and solution heat treated, at 50 x magnification;

Figure 21 is a photomicrograph of the centre of billet 2, extruded and solution heat treated, at 100 x magnification;

5        Figure 22 is a photomicrograph of the centre of billet 2, extruded and solution heat treated, at 200 x magnification;

10       Figure 23 is a photomicrograph of the centre of billet 1, as extruded, parallel to the extrusion axis, at 100 x magnification;

Figure 24 is a photomicrograph of the centre of billet 1, as extruded, parallel to the extrusion axis, at 200 x magnification;

15       Figure 25 is a photomicrograph of the centre of billet 2, as extruded, parallel to the extrusion axis, at 100 x magnification;

Figure 26 is a photomicrograph of the centre of billet 2, as extruded, parallel to the extrusion axis, at 200 x magnification;

20       Figure 27 is a photomicrograph of the centre of billet 1 parallel to the extrusion axis, after solution heat treatment, at 100 x magnification;

25       Figure 28 is a photomicrograph of the centre of billet 1 parallel to the extrusion axis, after solution heat treatment, at 200 x magnification;

Figure 29 is a photomicrograph of the centre of billet 2 parallel to the extrusion axis, after solution heat treatment, at 100 x magnification;

30       Figure 30 is a photomicrograph of the centre of billet 2 parallel to the extrusion axis, after solution heat treatment, at 200 x magnification;

Grain Size DeterminationAs Extruded Billets

5	Billet 1 Outside Edge	10.2 microns
	Billet 1 Centre	7.6 microns
	Billet 2 Outside Edge	7.6 microns
	Billet 2 Centre	7.6 microns
10	(Structure is quite broken up with very large and very small grains.)	

Solution Heat Treated Billets

	Billet 1 Outside Edge	25.3 microns
15	Billet 1 Centre	22.5 microns
	Billet 2 Outside Edge	22.5 microns
	Billet 2 Centre	20.3 microns
	(Well defined solution heat treated grain structure)	

20

DISCUSSION

25 The microstructure observed consists of magnesium primary magnesium and aluminum solid solution crystals and eutectic consisting of two phases, secondary magnesium solid solution crystals and  $Mg_{17}Al_{12}$  intermetallic compound. The structure was quite broken up in the "as cast" specimens and grain size measurement is only approximate.

30 Recrystallized grain structure in the solution heat treated specimens was more accurate and well defined in the microstructure.

The micros taken in the direction of the extrusion axis of the "as extruded" specimens showed long stringers in the microstructure. The

corresponding micros taken from the heat treated specimens showed a more evenly distributed recrystallized structure.

The amount of breakdown that the grain structure of the as-cast billet will undergo is likely a function of the amount of reduction. In the present case 7 to 1 reduction was used. Some sources suggest that the optimum degree of reduction should be on the order of from 10:1 to 17:1. In practice however the degree of reduction required may be less if the starting alloy is relatively fine grained.

## EXAMPLE 2

### OVERVIEW

3 in. diameter x 180 mm long slugs of magnesium alloy AZ61 were tested.

10 of the slugs had been solution heat treated.

SSM casting tests were made using a Buhler SCN66 machine. It was not possible at the time of the trials to store the injection curves due to software issues.

As a test piece, a welding test plate die was chosen, heated by oil to approximately 220°C.

In general, the material was SSM-castable, but different than other magnesium alloys. The thickwall part (10mm thick) was perhaps not ideal for magnesium casting.

### SSM HEATING

5 Slug heating was performed in a single coil induction heater and optimized such that the slugs were removed from the coil just prior to the onset of burning which corresponded to a softness which allowed dissection with a knife. Total heating time was approximately 230 seconds. Very little metal run-off was obtained during the heating process.

10 A single stage induction heater was utilized for the test as multi-stage induction heating was not available at the test facility. It is expected that better heating would have been obtained with multi-stage induction heating. Ideally at the end of the heating cycle the billet should have a uniform temperature throughout with a well controlled solid to liquid ratio.

15

### SSM CASTING

20 The first parts were cast using a plunger velocity of 0.3 to 0.8 meters per second. These conditions barely filled the die and visual laps were apparent at the end of the part.

25 With a velocity increase to 1.8m/s (onset of flashing), the parts filled better but lapping was still apparent. The best results were obtained using a plunger velocity of 1.2 m/s.

30 The heat treated slugs appeared lighter in color after heating and had less tendency to burn. The SSM parts produced from these slugs also appeared lighter in color.

Even at plunge velocities as low as 0.05 m/s and up to above 0.5 m/s, it was not possible to achieve a smooth metal front. In all cases the alloy flowed as individual "glaciers".



Two plates (numbers 34 and 35) which were formed at a plunger velocity of 1.8 m/s were subjected to metallurgical evaluation (see Example 3).

5

As can be seen, the only parameter varied in making the test plates was the gate or plunger velocity. Accordingly none of the resulting plates could be considered high quality castings. It is expected that much better results would have been obtained if the die temperature had been increased to approximately 300°C and the slugs were heated in the multi-stage induction heater.

10

As illustrated by the tests, if the gate speed is too high, the metal flow will not be laminar. Too low a gate speed results in metal solidification before the mold cavity fills.

15

Despite the less than optimal casting conditions, as illustrated by example 3 below, the cast plates show good physical properties.

20

The casting machine was a single cylinder unit having servo control to carefully control the force driving the slug into the closed die. Optimally the casting process will cause the outer skin of the slug which contains surface oxides resulting from the heating process to be removed from the virgin metal.

25

### EXAMPLE 3

Plates 34 and 35 were sectioned into six sections as illustrated in Figure 30. One quarter inch (1/4 in.) round samples were removed from the sections and tested for mechanical properties. The plates were not heat treated and the results are tabulated in Table 1 below.

30

TABLE 1

PLATE NO.	SAMPLE NO.	SAMPLE TYPE	UTS (ksi)	YS (ksi)	ELONG %
34	2	.250" ROUND	31.5	13.9	10.9
34	4	.250" ROUND	33.2	14.2	14.1
34	6	.250" ROUND	32.9	14.5	13.6
35	2	.250" ROUND	33.6	14.7	12.3
35	4	.250" ROUND	31.1	13.9	10.3
35	6	.250" ROUND	33.3	13.9	13.3

Plates 34 and 35 were subsequently solution heat treated for 12 hours at 426°C and still air cooled. One quarter inch (1/4 in.) round samples were cut from the plates and the mechanical properties of those samples were tested. The results of the tests are tabulated in Table 2 below. In Table 2 below the sample plan for the heat treated plates is the same as illustrated in Figure 31.

TABLE 2

PLATE NO.	SAMPLE NO.	SAMPLE TYPE	UTS (ksi)	YS (ksi)	ELONG %	COMMENTS
34	1	.250" ROUND	23.4	14.1	3.0	OXIDE INCL.
34	3	.250" ROUND	SAMPLE DAMAGED IN MACHINING			
34	5	.250" ROUND	37.6	14.6	18.5	
35	1	.250" ROUND	37.0	12.8	15.7	
35	3	.250" ROUND	36.9	13.8	16.4	
35	5	.250" ROUND	36.8	12.8	19.3	

Photomicrographs of one of the plates were taken at locations M1 and M2 as illustrated in Figure 32. The photomicrographs are reproduced in Figures 33 through 36 as follows.:

- 5           Figure 33 is a photomicrograph of sample M1 at 50x magnification;  
            Figure 34 is a photomicrograph of sample M1 at 100x magnification;  
            Figure 35 is a photomicrograph of sample M2 at 50x magnification;  
10           Figure 36 is a photomicrograph of sample M2 at 100x magnification.

- 15           The above description is intended in an illustrative rather than a  
restrictive sense. One skilled in the art would recognize that the specific  
process parameters used in the examples would have to be varied to adapt  
the present invention to particular alloys, equipment and parts being cast.  
For example, although AZ61 magnesium alloy was utilized in the tests no  
doubt other magnesium alloys could be used. The process can also be adapted  
20           to metal systems other than magnesium where the metal is capable of  
forming a two-phase system comprising a solid particles in a lower melting  
matrix. The process will work with aluminum and may also work with  
other similar metal systems such as copper. It is intended that any such  
variations be deemed as within the scope of the present patent as long as  
25           such are within the spirit and scope of the claims set out below.

- Preferably heating of the billet 22 prior to forming should be carried  
out at a rate of no greater than 30°C per second and even more preferably at  
a rate of no greater than 20°C per second if aluminum is being used. Heating  
30           at a rate greater than 30°C per second may result in the precipitation of  
silicon from the resulting stresses thereby deleteriously affecting  
machinability of the finished part. It has been found that a three stage

induction heater is particularly well suited to maintaining a desirable heating rate.

5

10

15

20

25

30

## I CLAIM

1. A semi-solid metal forming process using a cast billet and having the following steps:

1. heating the cast billet to a temperature above its recrystallization temperature and below its solidus temperature;
2. extruding the heated cast billet from step 1 into an extruded column;
3. cutting the extruded column into at least one billet
4. heating the billet from step 3 to a semi-solid state; and
5. squeezing the billet from step 4 into a cavity in a metal forming die set to form a part.

2. A semi-solid metal forming process as claimed in claim 1 wherein:

AZ61 magnesium alloy is used;

in step 1 the cast billet is heated to a temperature of approximately 300°C;

the heated cast billet is extruded in step 2 at a temperature of from about 330 - 350°C;

the heating in step 4 corresponds to a softness which allows dissection with a knife.

3. A semi-solid metal die casting process using a direct chill cast billet and having the following steps:

1. heating the direct chill cast billet to a temperature above its recrystallization temperature and below its solidus temperature;
2. reducing the diameter of the heated billet from step 1 and breaking down its grain structure by extruding it through an extruding die to form an extruded column;
3. cutting the extruded column into billets;
4. heating a billet from step 3 to a forming temperature above its liquidus temperature;
5. placing the heated billet from step 4 into an injection chamber in a semi-solid die casting machine;
6. injecting the heated billet section into a mold to form a part; and
7. removing the part from the mold.

4. A semi-solid metal die casting process as claimed in claim 3 wherein the direct chill cast billet during its production was cooled at a rate exceeding 2°C per second.

5. A semi-solid metal die casting process as claimed in claim 4 wherein the direct chill cast billet has a maximum grain size of less than 100 microns.

6. A semi-solid metal forging process using a direct chill cast billet and having the following steps:

1. heating the direct chill cast billet to a temperature above its recrystallization temperature and below its solidus temperature;
  2. reducing the diameter of the heated billet from step 1 and breaking down its grain structure by extruding it through an extruding die to form an extruded column;
  3. cutting the extruded column into billets;
  4. heating a billet from step 3 to a forming temperature above its liquidus temperature;
  5. placing the heated billet from step 4 between a set of dies in a forging machine;
  6. actuating the forging machine to squeeze the billet between the set of dies to form a part; and
  7. separating the dies and removing the part.
7. A semi-solid forging process as claimed in claim 6 wherein the direct chill cast billet was cooled at a rate exceeding 2°C per second during its production.
8. A semi-solid forging process as claimed in claim 7 wherein the direct chill cast billet has a maximum grain size of less than 100 microns.
9. A billet for use in a semi-solid metal forming process produced according to the following steps:

1. heating a direct chill cast billet to a temperature above its recrystallization temperature and below its solidus temperature;
  2. reducing the diameter of the heated billet from step 1 and breaking down its grain structure by extruding it through an extruding die to form an extruded column;
  3. cutting the extruded column into billets.
10. A billet as claimed in claim 9 wherein the direct chill cast billet was cooled at a rate exceeding 2°C per second during its production.
11. A billet as claimed in claim 10 wherein the direct chill cast billet has a maximum grain size of less than 100 microns.
12. A semi-solid metal forming process utilizing a billet as claimed in claim 11 wherein:
1. the billet is heated to a forming temperature above its liquidus temperature;
  2. the billet from step 1 is squeezed between the dies of a metal forming die set to form a part.
13. A semi-solid metal forming process utilizing a billet as claimed in claim 10 wherein:
1. the billet is heated to a forming temperature above its liquidus temperature;
  2. the billet from step 1 is squeezed between the dies of a metal forming die set to form a part.




14. A semi-solid metal forming process utilizing a billet as claimed in claim 9 wherein:

1. the billet is heated to a forming temperature above its liquidus temperature;
2. the billet from step 1 is squeezed between the dies of a metal forming die set to form a part.

15. A semi-solid metal forming process as claimed in claim 5 wherein a suitable alloy of aluminum used and is heated in step 4 in a three stage induction heater at a rate no exceeding 30°C per second.

16. A semi-solid metal forming process as claimed in claim 15 wherein the heating rate in step 4 does not exceed 20°C per second.

17. A semi-solid metal forming process as claimed in claim 14 wherein in step 1 the billet is heated to its forming temperature at a rate between 20°C per second and 30°C per second.

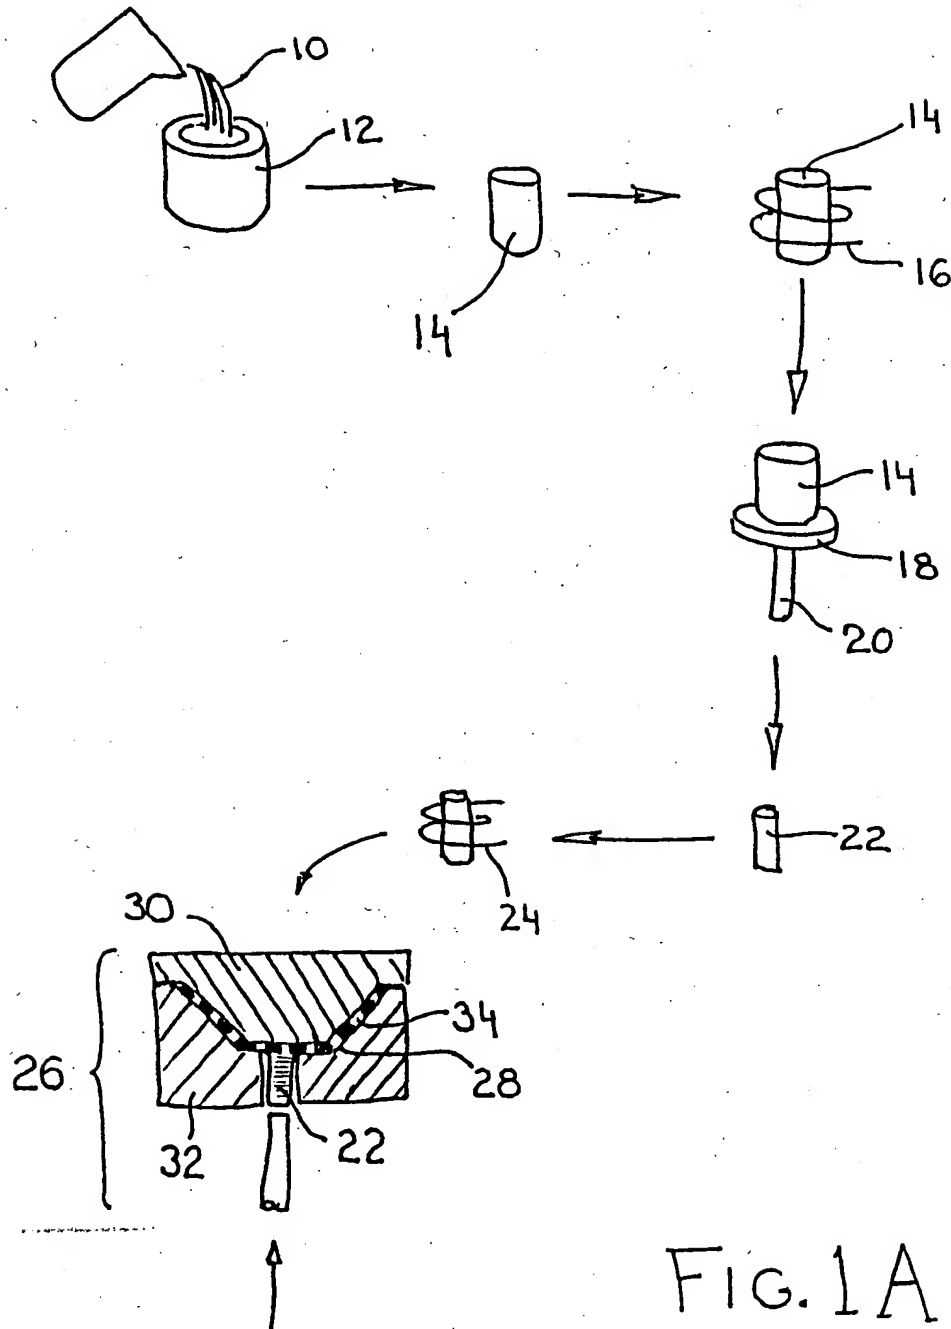

2/21

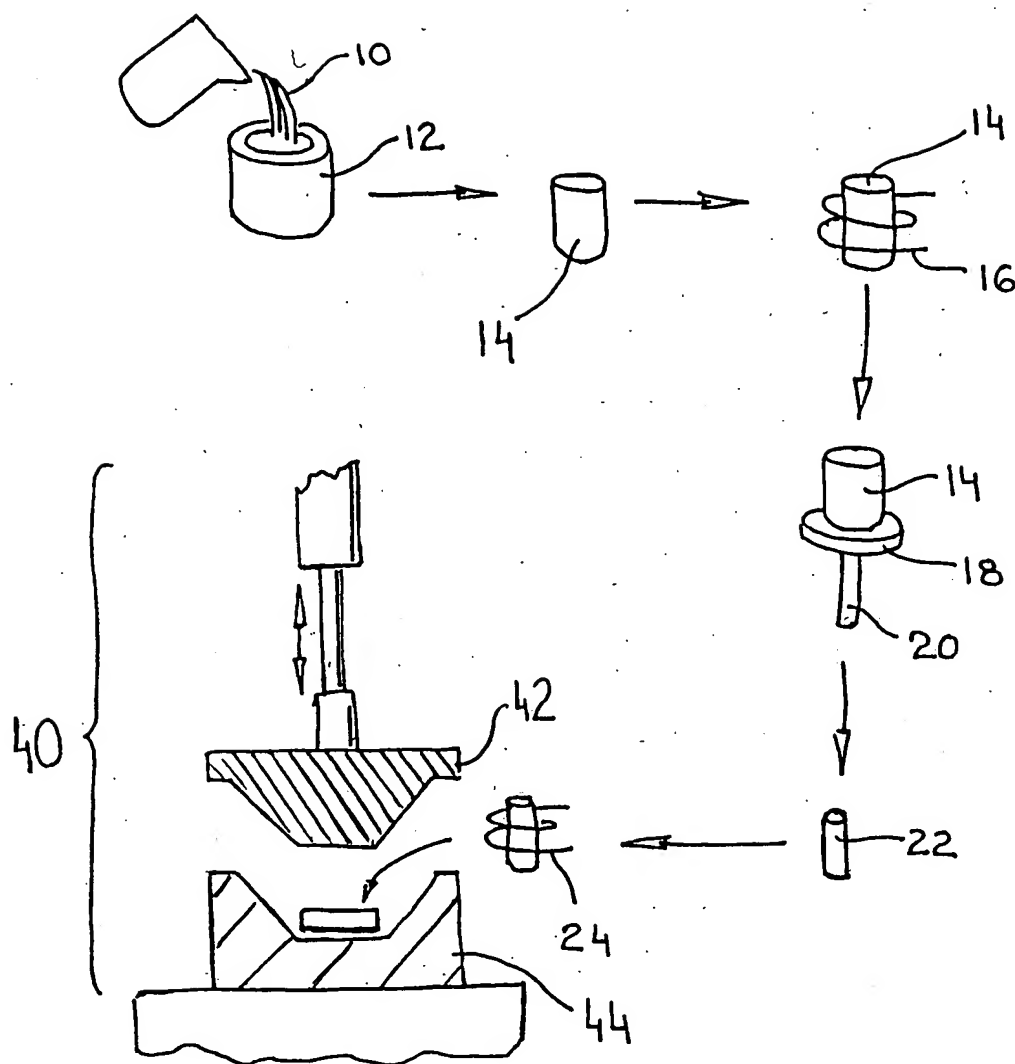


FIG.1B

3/21

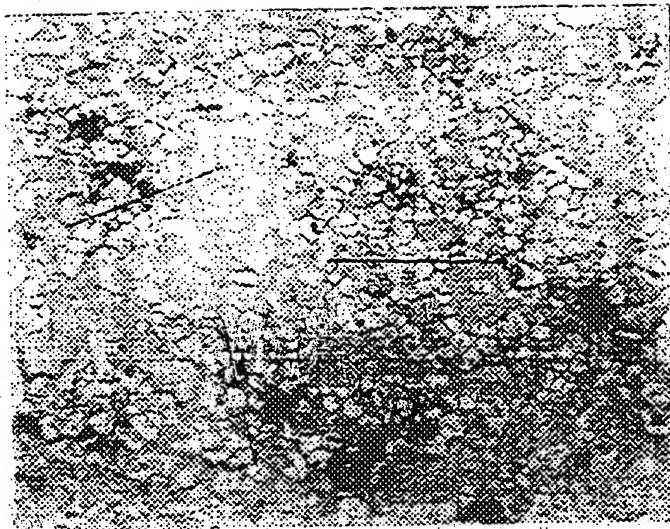


Fig. 2

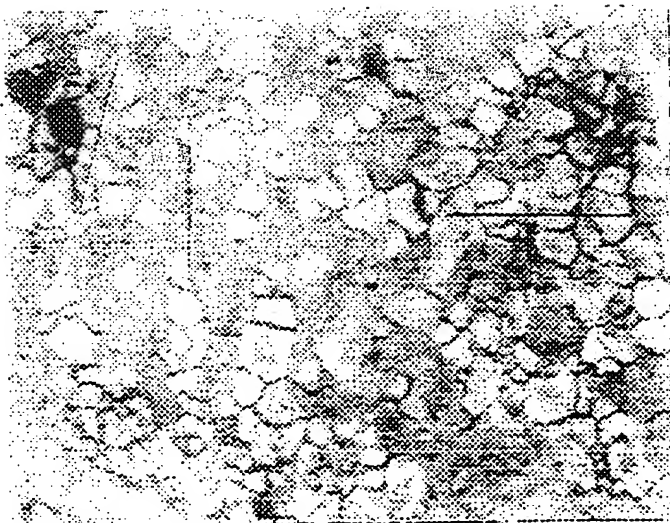


Fig. 3

4/21

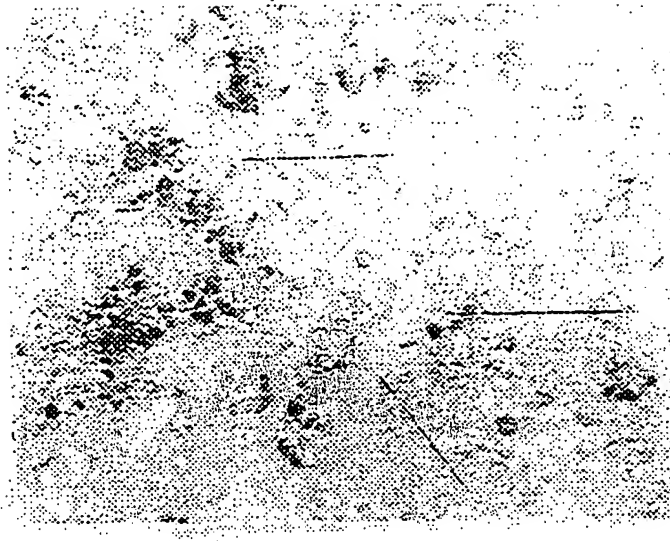


Fig. 4

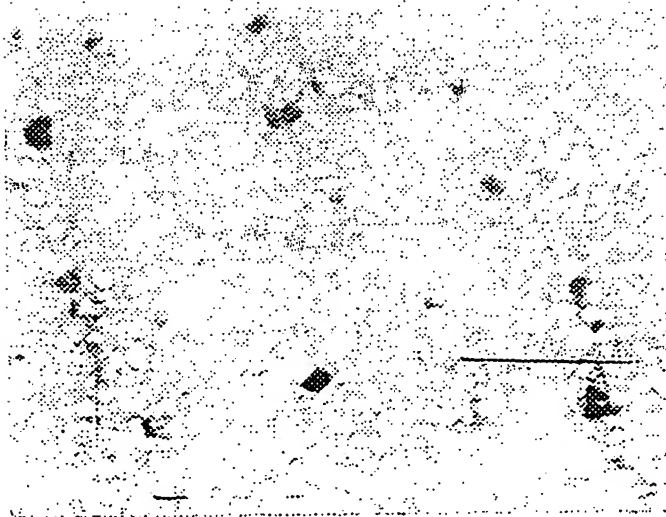


Fig. 5

5/21

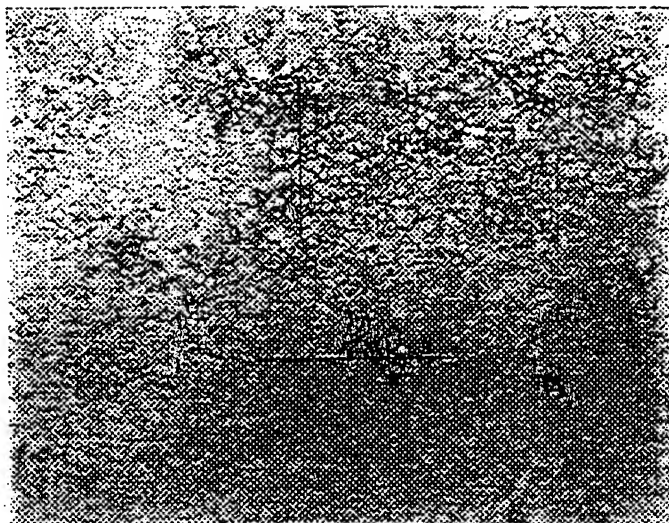


Fig. 6

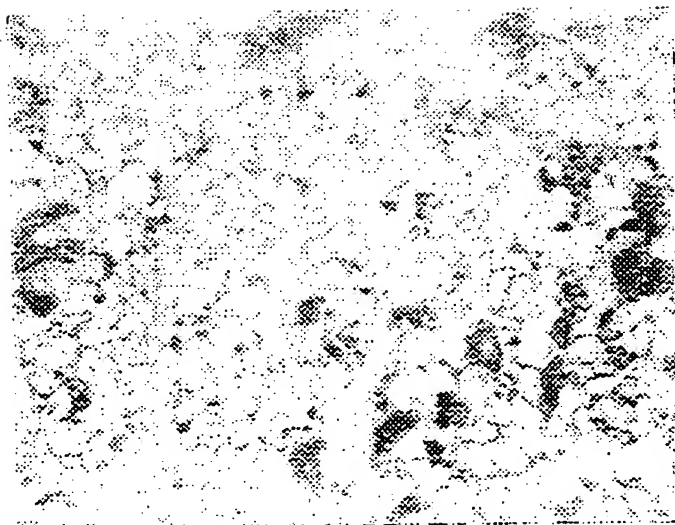


Fig. 7

6/21

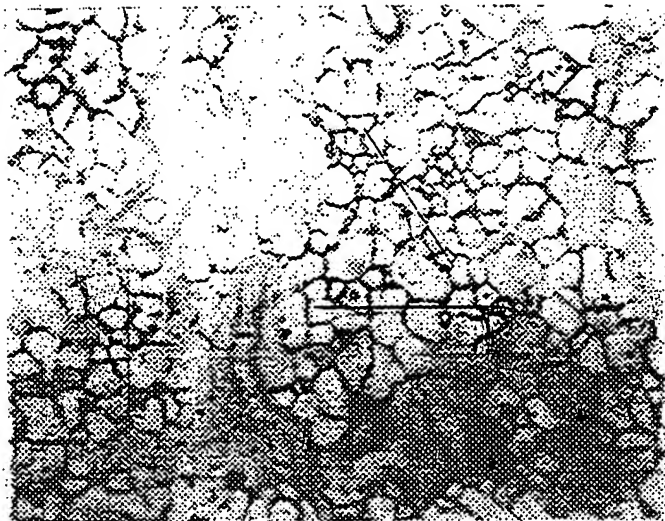


Fig. 8

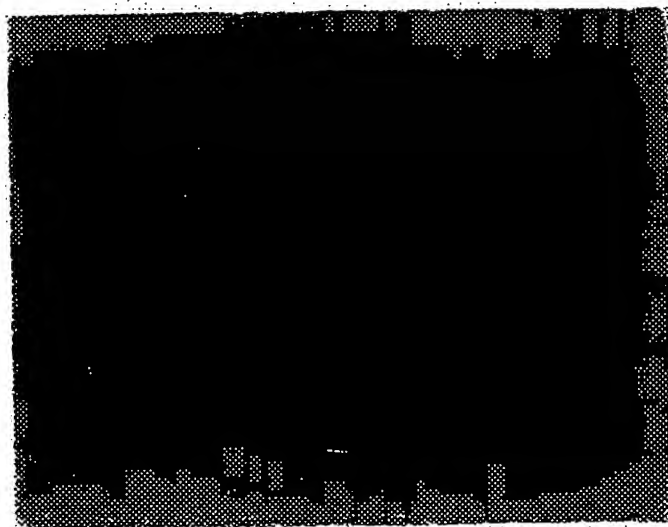


Fig. 9

7/21

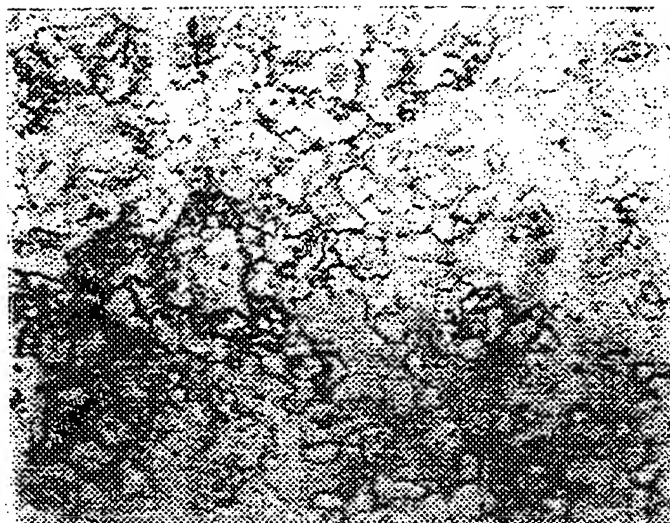


Fig. 10

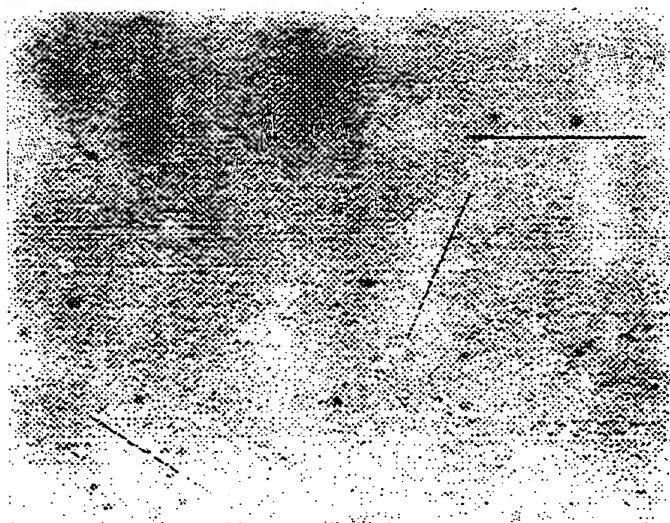


Fig. 11



8/21

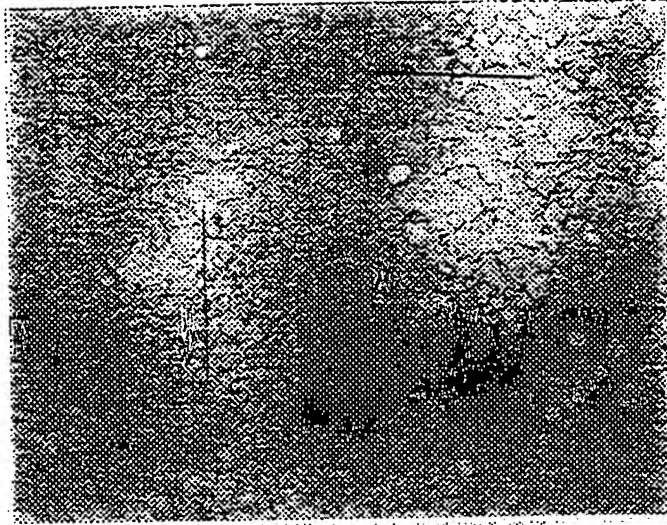


Fig. 12

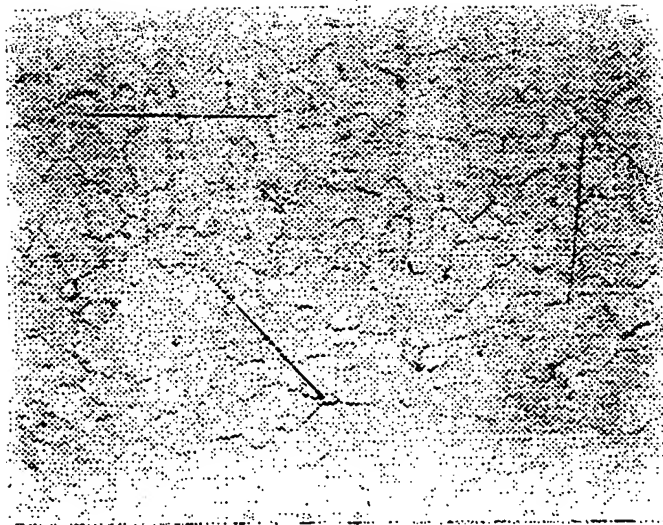


Fig. 13

9/21

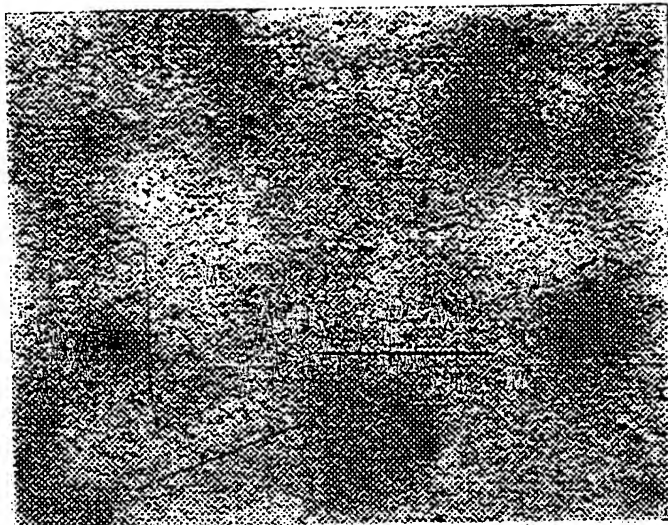


Fig. 14

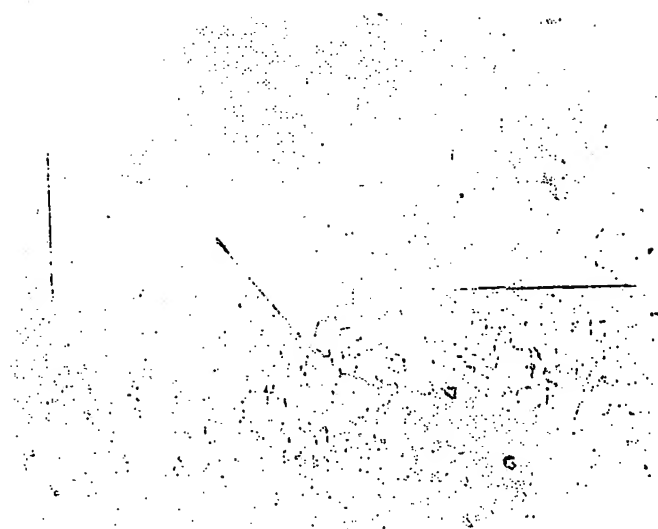


Fig. 15

10/21

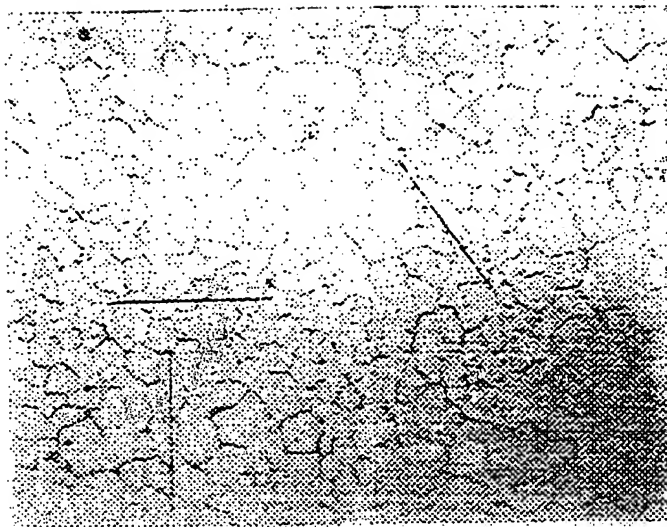


Fig. 16

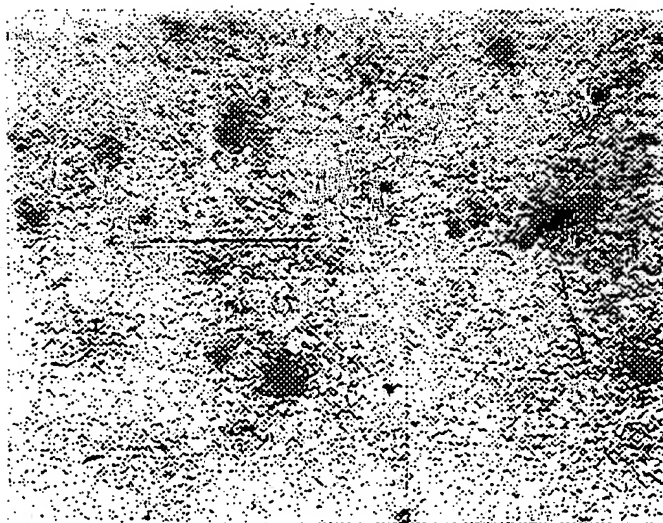


Fig. 17

SUBSTITUTE SHEET (RULE 26)

11/21

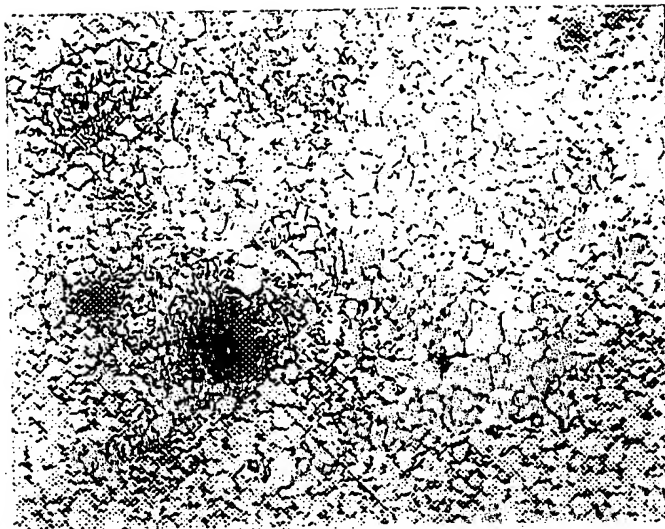


Fig. 18

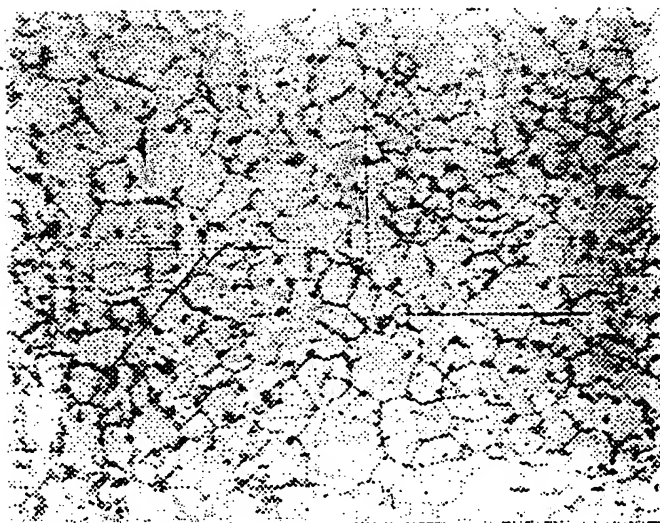


Fig. 19

SUBSTITUTE SHEET (RULE 26)

12/21

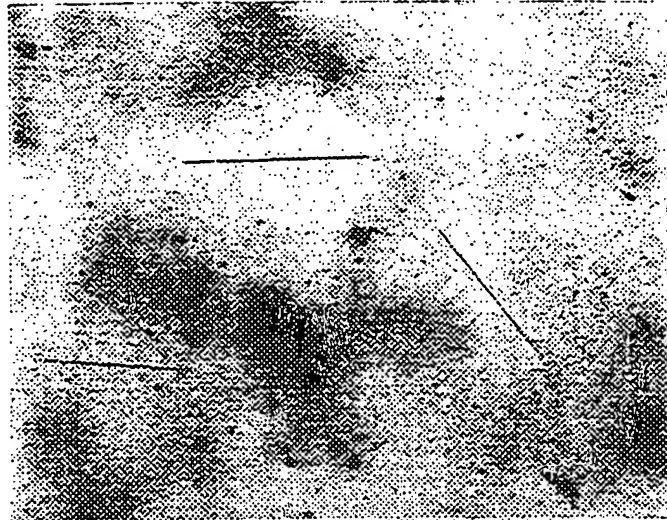


Fig. 20



Fig. 21

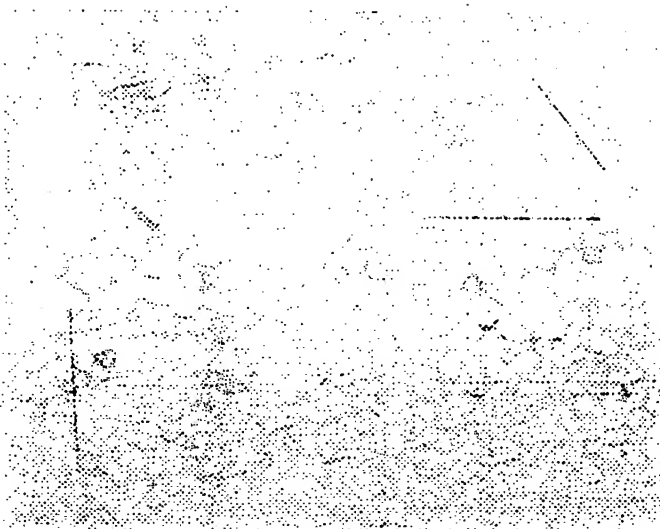


Fig. 22



Fig. 23

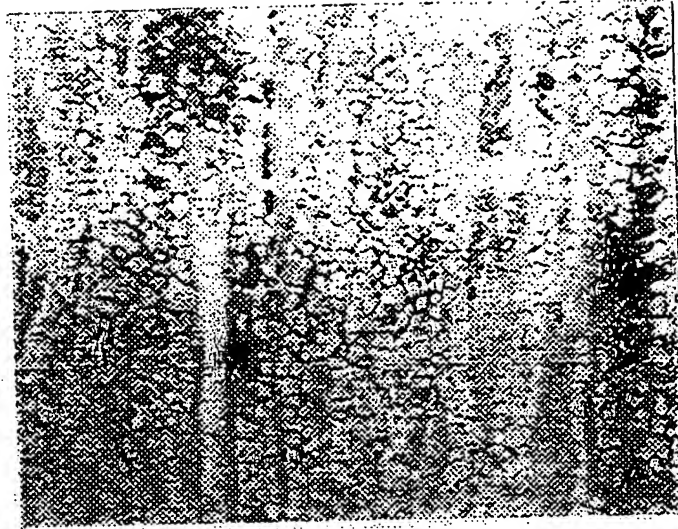


Fig. 24

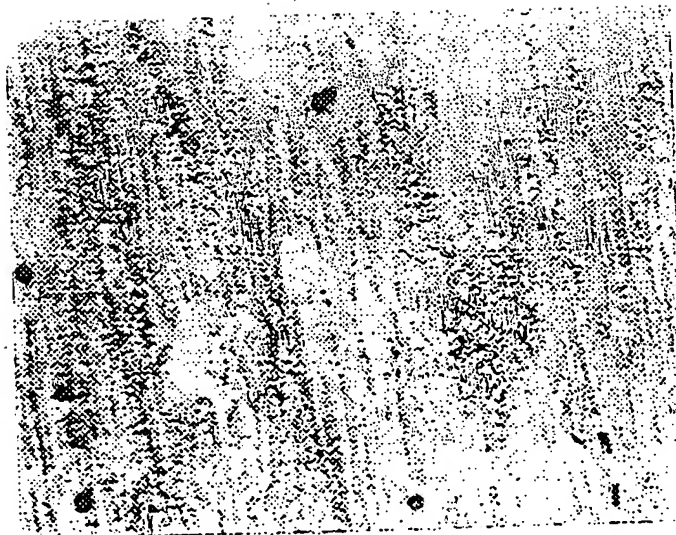


Fig. 25

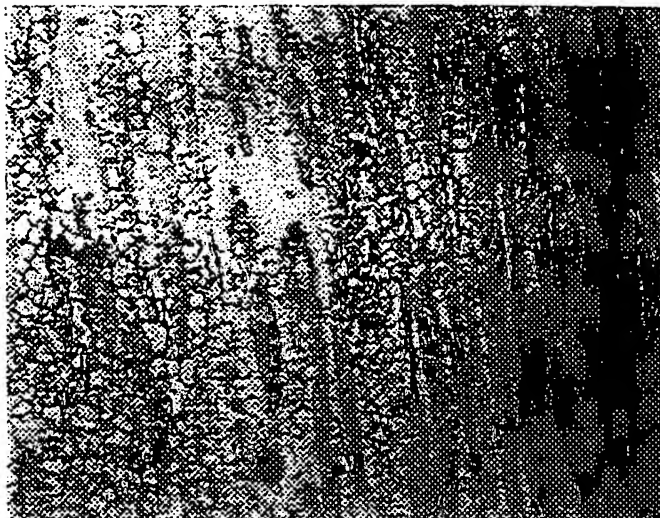


Fig. 26

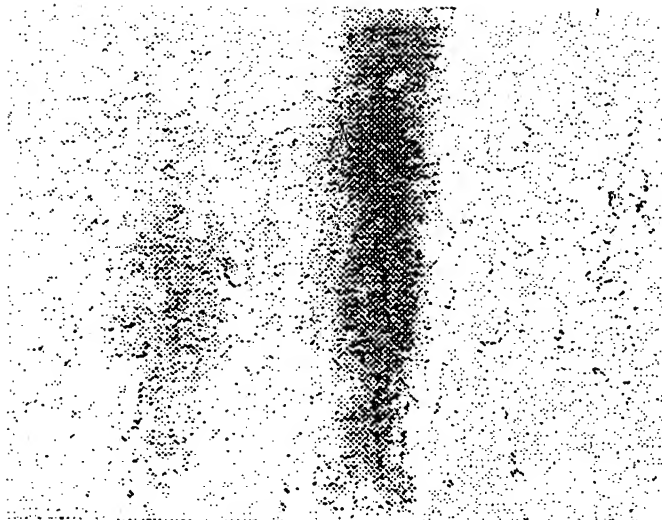


Fig. 27



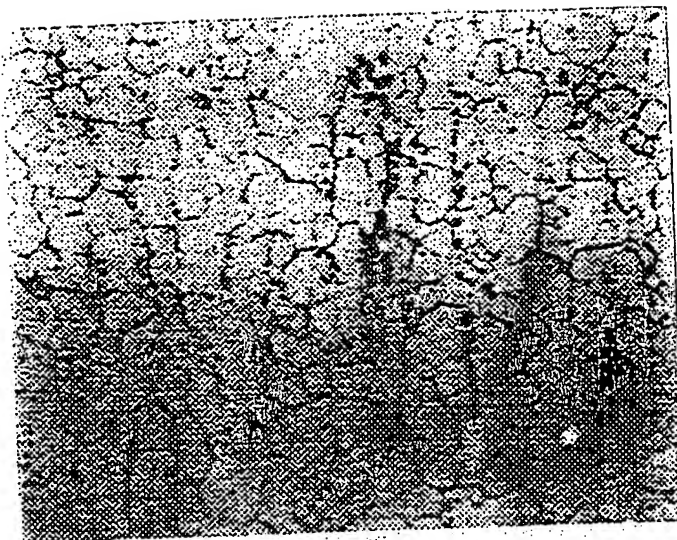


Fig. 28

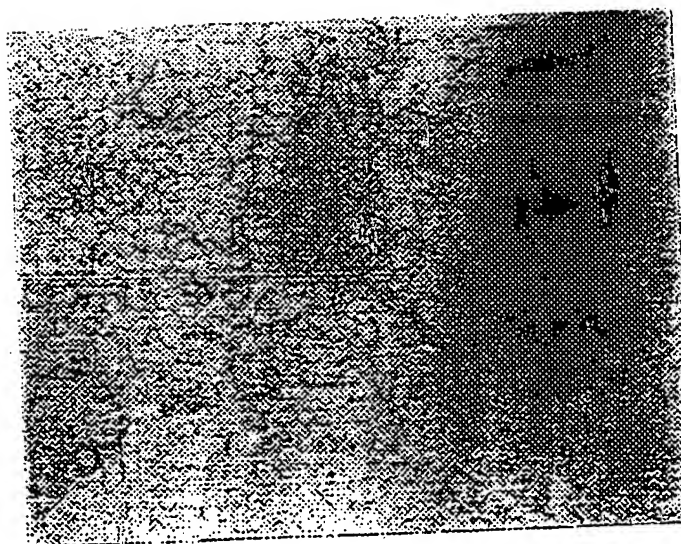


Fig. 29

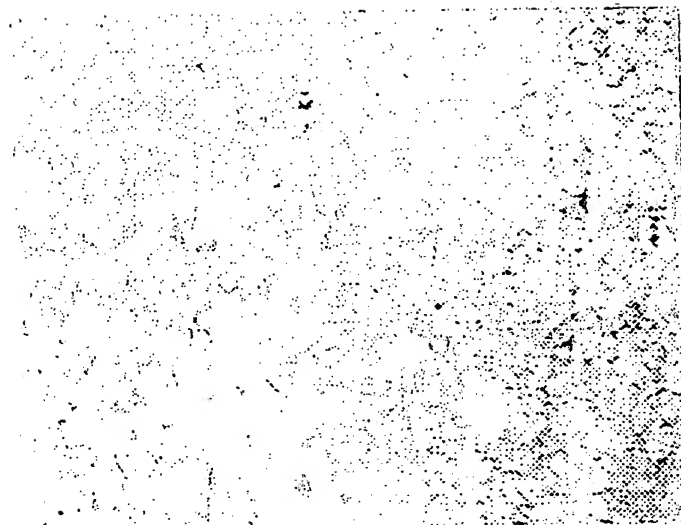


Fig. 30

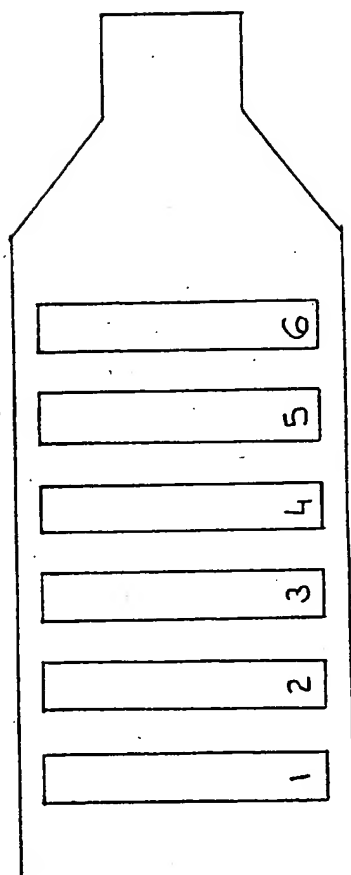


FIG. 31

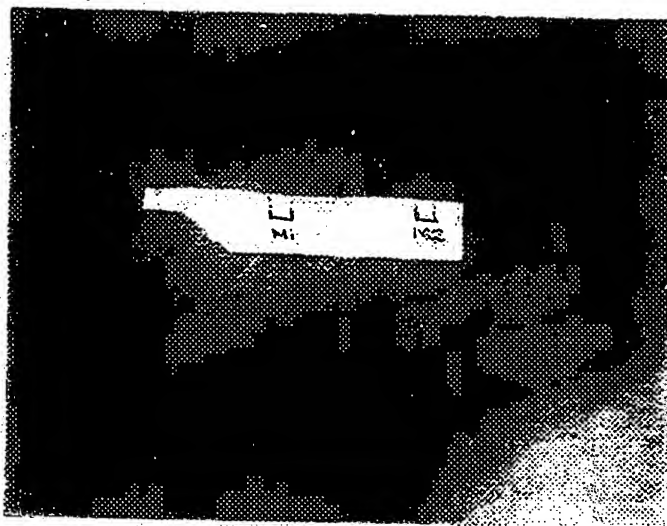


Fig. 32

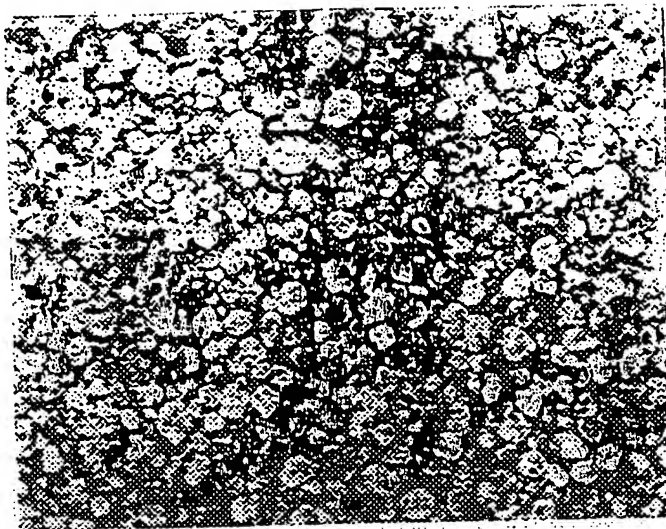


Fig. 33

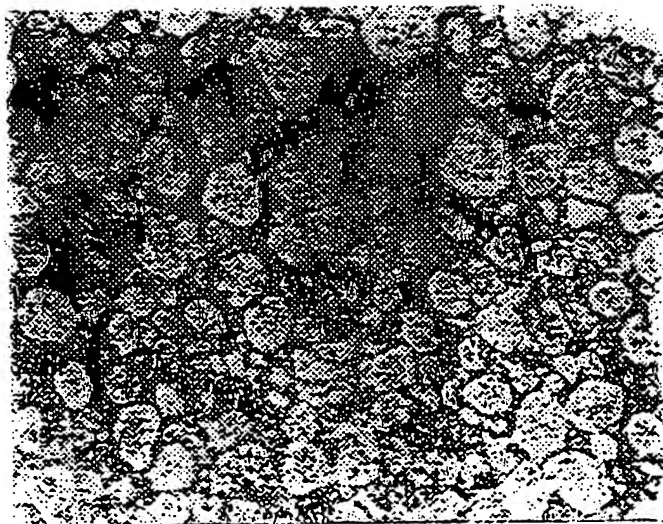


Fig. 34

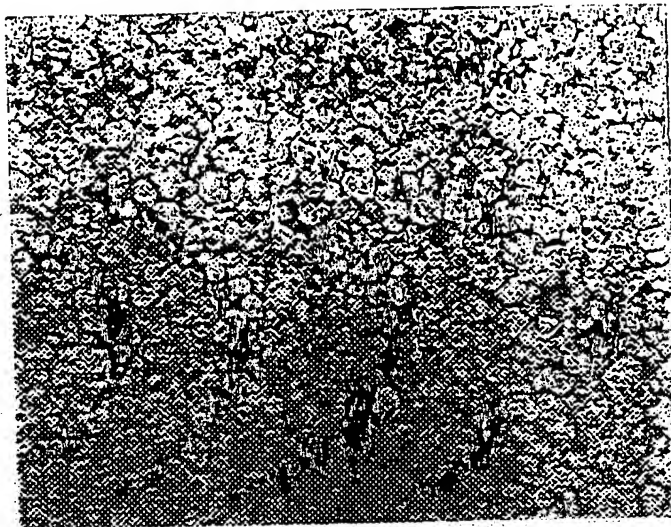


Fig. 35

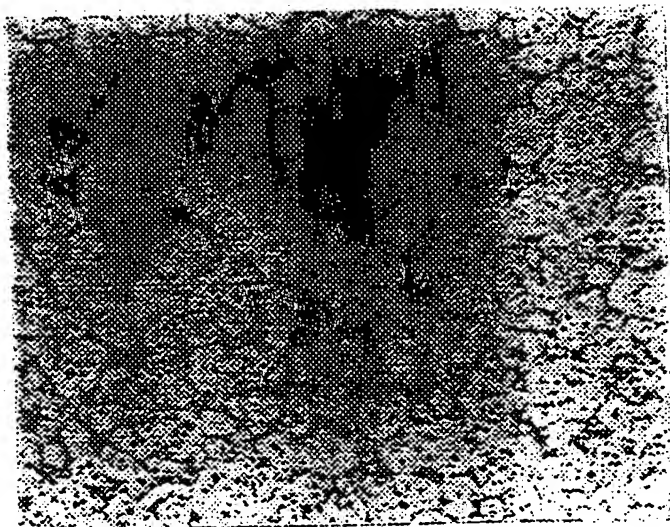


Fig. 36

# INTERNATIONAL SEARCH REPORT

Application No

PCT/CA 98/00062

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B22D17/00 B21C23/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B22D B21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 415 374 A (YOUNG KENNETH P ET AL) 15 November 1983 cited in the application	1,3,9
Y	see the whole document	6
X	M. KIUCHI ET AL.: "MASHY-STATE EXTRUSION, ROLLING AND FORGING" June 1994, THE 3RD INT'L CONF. ON SEMI-SOLID PROCESSING OF ALLOYS AND COMPOSITES XP002066438	9
Y	see the whole document	6

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 May 1998

Date of mailing of the international search report

12/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

WOUDENBERG, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 98/00062

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4415374 A	15-11-1983	AU 552153 B	22-05-1986
		BR 8301524 A	06-12-1983
		CA 1203457 A	22-04-1986
		DE 3382585 A	06-08-1992
		EP 0090253 A	05-10-1983
		IN 157797 A	21-06-1986
		JP 1493482 C	20-04-1989
		JP 58213840 A	12-12-1983
		JP 63040852 B	12-08-1988